







# X-DH ALH 22 (02) X-DH ALH 27 (02) Data Hook

2446884-11.2024

**cULus LISTED**  
[Cable Hook]  
E505554

Load rating: (70lbs). Corresponds with mechanical strength according to UL Standard for Hardware for the Support of Conduit, Tubing and Cable, UL2239. Suitable for use in Air Handling Spaces (plenums) in accordance with Section 300.22 (C) and (D) of the National Electrical Code, and Rules 12-010 (3), (4), and (5), and 12-020 of the Canadian Electrical Code, Part I. Mounting orientation: Wall or ceiling.

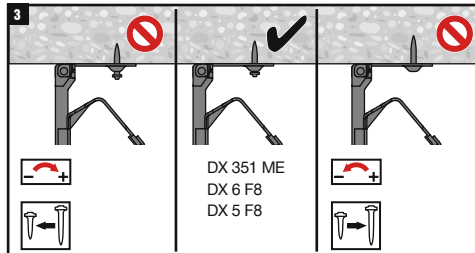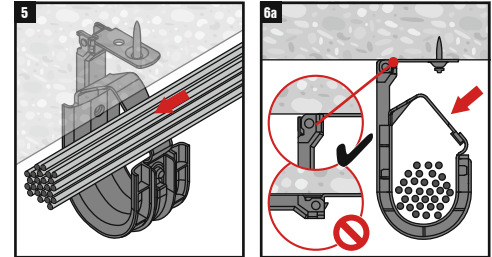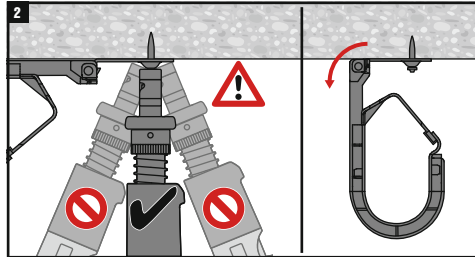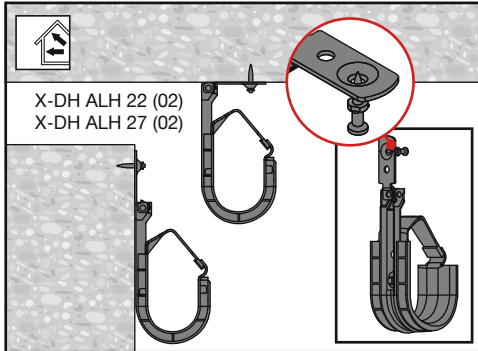

6b

Cable Type	X-DH 1" ALH (02)	X-DH 2" ALH (02)	X-DH 4" ALH (02)
CAT 5e	30	95	360
CAT 6	20	70	260
CAT 6A	12	40	155
CAT 7A	10	35	125

Cable capacity is calculated based on a 70% fill rate.

1

ALH 27	ALH 22
DX 351-CT DX 351-ME, DX 351-ME + X-PT 351 DX 5 F8, DX 5 F8 + PT 5	DX 5 F8, DX 5 F8 + PT 5
DX 6 F8, DX 6 F8 + PT 6	DX 6 F8, DX 6 F8 + PT 6

PBH-S CRS
 PBH-S
 S-MD HWH3

